


4 Wire Villa Video Intercom System


10" video intercom kit




7" video intercom kit

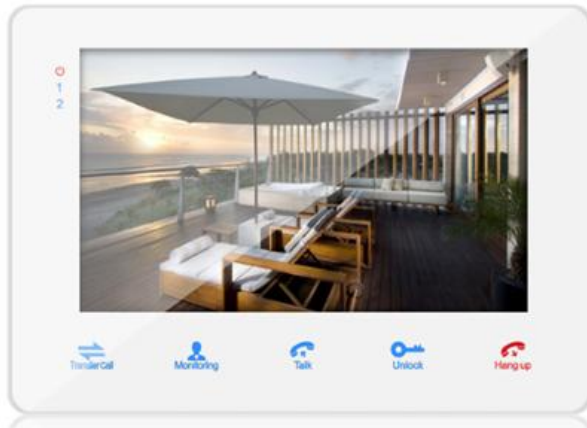

7" video intercom kit

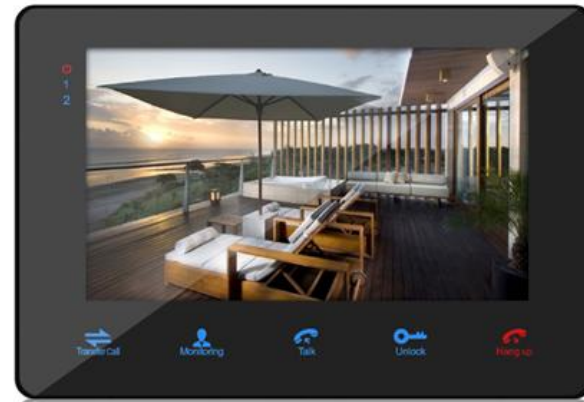

Main Function

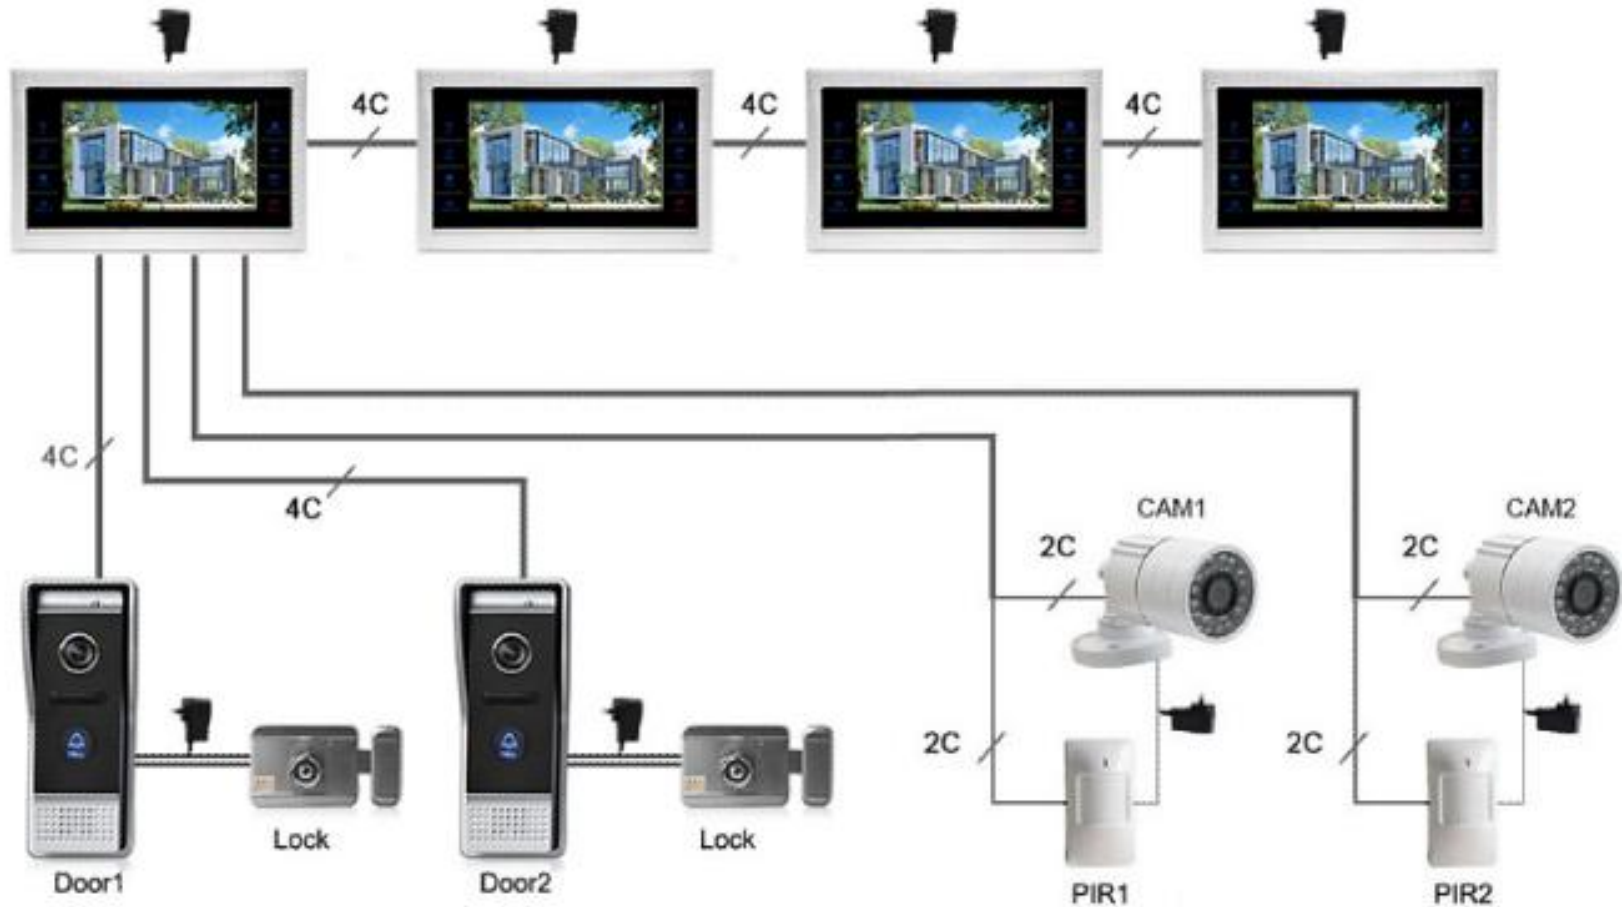

- Expandable up to 2 door cameras+4 indoor monitors+2 analog CCTV cameras+2 motion detectors.
- Time and Date display when standby.
- Recording and Snapshot with built-in memory.
- Motion detection and voice message.
- Intercommunication & Call Transfer.
- Door camera: 800/600/420TVL, wide angle 110/140 degree/pinhole 68 degree; with angle bracket for side wall mounting; IP65 weatherproof; with IR LED light for night vision.
- Easy to install 4 wire system, 2 wire for option.

OSD Menu/GUI Menu for easy use and setting



Time and Date display



Touch Button Aluminum Alloy Wire Drawing Shell.



Video Record and Picture memory SD card supported(not included)



Dual-way Intercom, Call Transfer



Support Electronic Lock, Analog Camera, PIR (Not Included).

Our video intercom supports electronic lock, analog CCTV camera, and PIR detector. It can protect your home and property in all aspects.



IR LED Offset Lighting Can Obtain Better Evening Viewing



Waterproof IP65



IP65
Weatherproof

Operation Temp: -40°C ~ +50°C



Rain Cover

Rubber Gasket Ring



Specification

indoor monitor	Monitor	10.1" TFT		7" TFT
	Resolution	1024(H)*3(RGB)*600(V)		800(H)*3(RGB)*480(V)
	Memory	Support Max. 32GB SD card		
	Intercom Mode	Hands-free dual-way communication		
	Conversation duration	120s		
	Keypad	Touch button		
	Power Consumption	400mA Max.		
	Power Supply	External power supply DC12V		
	Support	2 outdoor cameras+ 4 indoor monitors + 2 analog CCTV cameras + 2 motion detectors.		
	Material	aluminum alloy		Acrylic
	Operation Temp	-10℃ +60℃		
Installation	Surface mounted			
outdoor camera	Camera Sensor (optional)	1/4" CMOS, 420TVL	1/4" CMOS, 600TVL	1/3" CMOS, 800TVL
		3.7mm lens	3.7mm lens	3.7mm lens
	View Angle(optional)	68°/110°/140°		
	Power Consumption	200mA Max.		
	Power Supply	Supplied from indoor monitor		
	Material	Aluminum alloy		
	Waterproof	IP65		
	Operation Temp	-40℃ +50℃		
Istallation	Surface mounted			

Package



1x Indoor Monitor
1x Monitor Mounting Plate
1x Power Adapter
5x 200mm 4 Pin Connector
2x Gurantee Card
2x English User Manual

1x Outdoor Call Panel
1x Call Panel Mounting Plate
1x 200mm 2 Pin Connector
2x Screw Bag
2x Qualified Certificate
1x Rain Cover

Connection

