


# 2 Wire Villa Video Intercom




## System Diagram

Villa video intercom system

### 2 Wire Villa Intercom System

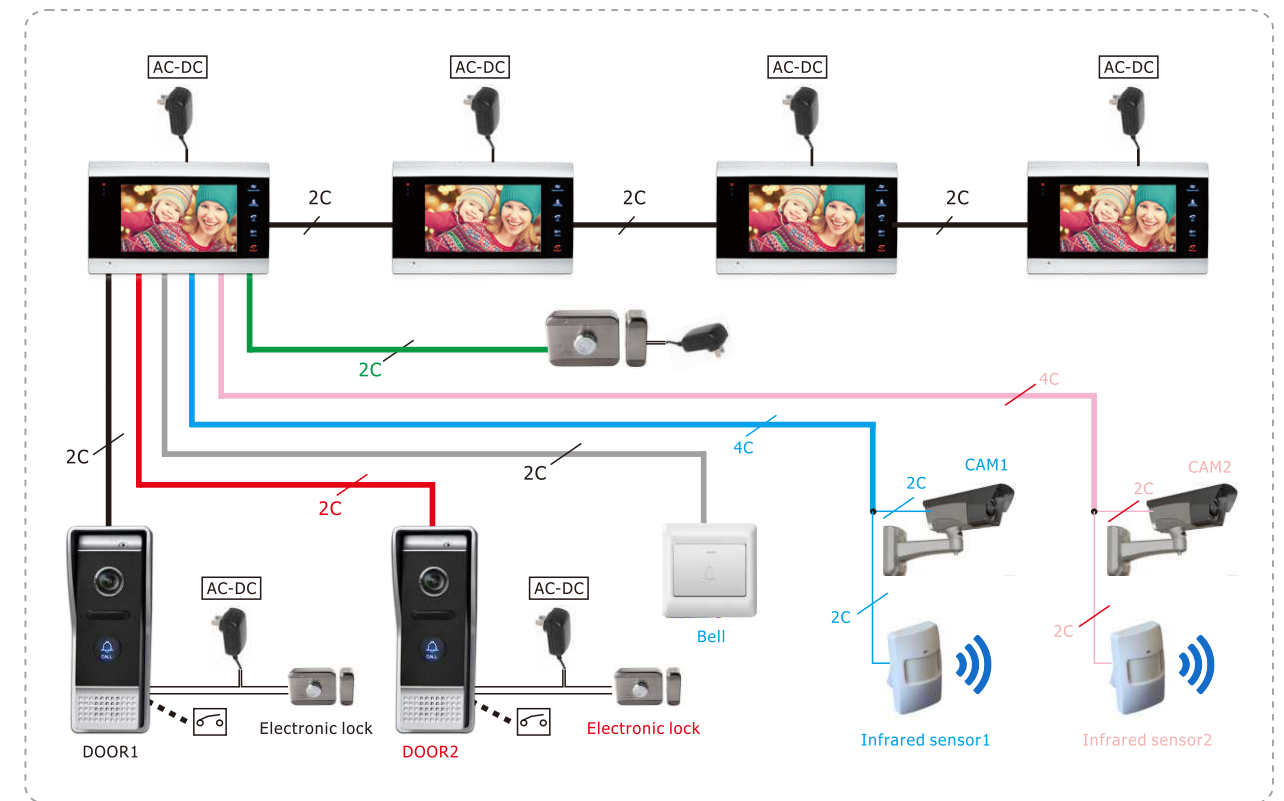


### 4 Wire Villa Intercom System

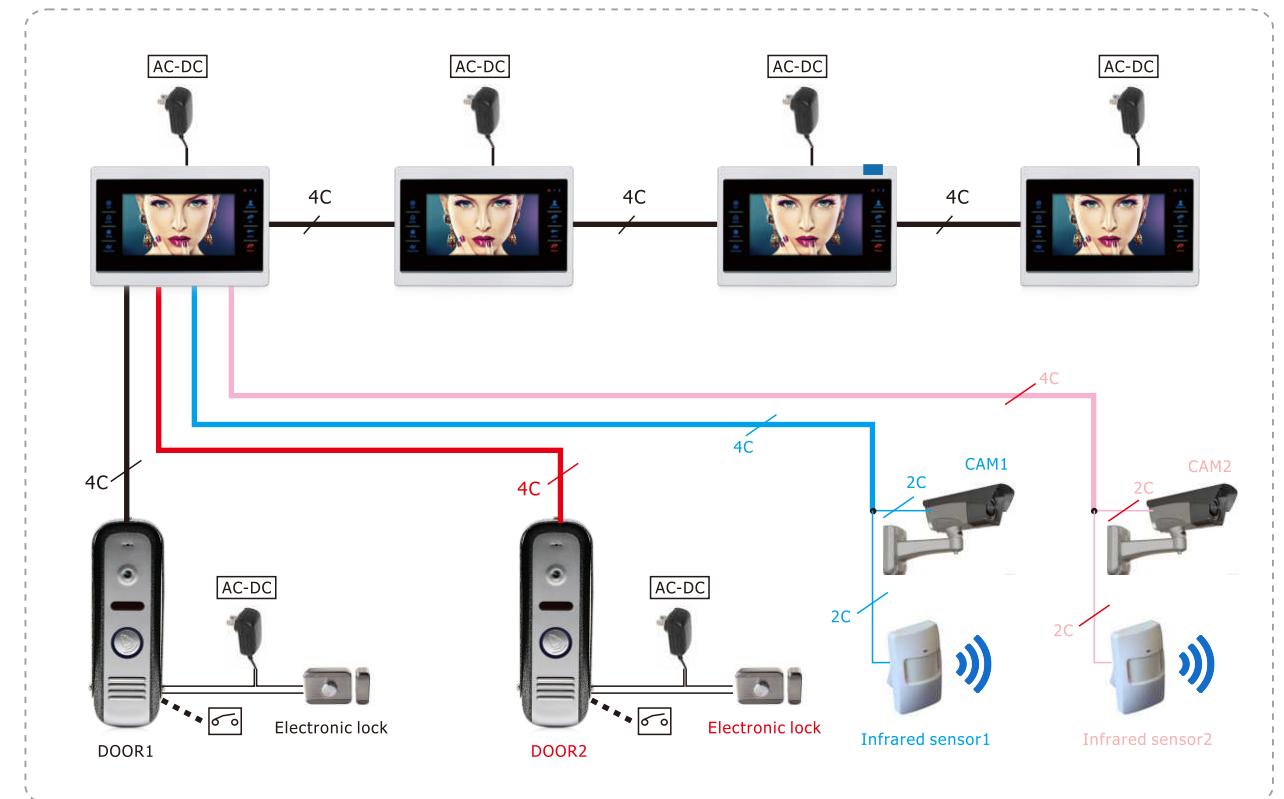

# Indoor Monitor

2 Wire Villa video intercom

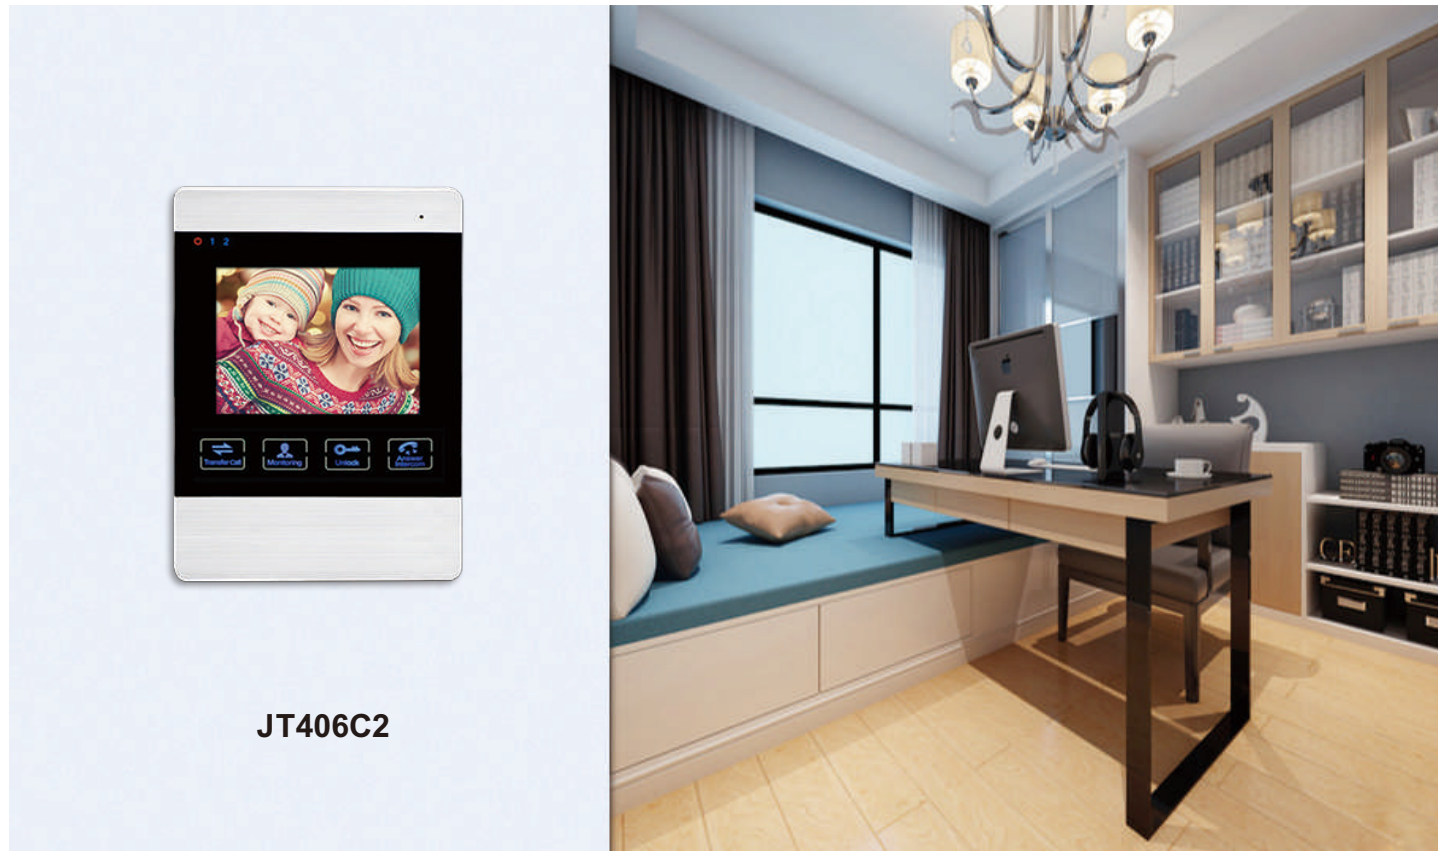

JT406C2

## Features (JT406C2)

- 4.3" TFT display, wire drawing acrylic case
- Sensor's button, with storage
- Support 2 call panel + 4 indoor monitor + 2 CCD camera, each call panel can set different ring tones
- Time & clock keep display on monitor stand-by mode
- Built-in motion detection function
- Multi-language OSD menu (English, Arabia, Polish, French, Spanish, Czech, Russia, Slovak, Lithuania optional)



JT713C2

# Indoor Monitor


2 Wire Villa video intercom

## Features

- 7" TFT display, wire drawing acrylic case
- Sensor's button, with storage
- Support 2 call panel + 4 indoor monitor + 2 CCD camera, each call panel can set different ring tones
- Time & clock keep display on monitor stand-by mode
- Built-in monitor detection function
- Multi-language OSD menu (English, Arabia, Polish, French, Spanish, Czech, Russia, Slovak, Lithuania optional)



JT706C2

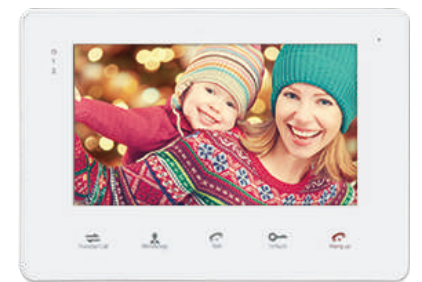

JT708C2

## Specifications

Model	JT713C2/JT706C2/JT708C2	JT406C2
Monitor	7" TFT LCD screen	4.3" TFT LCD screen
Resolution	800(H)*3(RGB)*480(V)	320(H)*3(RGB)*240(V)
Memory	Built-in memory can save 86pictures, support max.32G SD card	
Intercom Mode	Hands-free dual communication	
Motion Ddetection	Yes	
Conversation	120s	
Sensor's Key	Yes	
Power Consumption	400mA max.	300mA max.
Power Supply	External power DC15V 1A	
Operating Temp	-10℃ — +60℃	
Installation	Surface mount	



# Outdoor Station

2 Wire Villa video intercom



JT203C2

## Features

- Robust metal construction
- 420TVL/600TVL/800TVL resolution optional
- 2.8mm CMOS wide angle lens
- 110° horizontal view
- Illuminated doorbell button
- Weather resistant Ip65 rating
- Embedded box included
- IR LED's for better night vision
- RFID access, support 200pcs ID cards



JT213C2

JT215C2

# Outdoor Station

2 Wire Villa video intercom

## Features

- Robust slim metal construction
- 420TVL/600TVL/800TVL resolution optional
- 2.8mm CMOS wide angle lens
- 110° horizontal view
- Illuminated doorbell button
- Weather resistant Ip65 rating
- Rain cover included
- IR LED's for better night vision



JT212C2-1

JT212C2-2

## Specifications

Model	JT212C2-1/JT212C2-2	JT213C2/JT215C2	JT203C2
LEDs For Night LED	IR LEDs(120° )		
Definition	420TVL	600TVL	800TVL
Camera Sensor	1/4"CMOS,2.8mm lens	1/3"CMOS,2.8mm lens	1/3"CMOS,2.8mm lens
View angle	110°	110°	110°
Power Consumption	200mA max.		
Standby Consumption	50mA max.		
Unlock	No	RFID card or password	No
Power Supply	15V1A	15V1A	Supplied from indoor unit
Operating Temp	-40℃—+50℃		
Waterproof Rate	IP65		
Installation	Surface mount		