

Digital SIP Apartment Video Intercom System ▶

Outdoor Station

Digital SIP Apartment video intercom system



JT7202

Features

- 4.3" LCD screen / 7" LCD screen
- 1.0MP camera, 90° angle view
- CAT5 network cable connection, easy to install
- RFID card & code access
- Aluminium housing, physical button
- Call every monitor and guard center
- Duplex communication
- Ip53 waterproof level
- IR LED light for better night vision
- Flush mount

Specifications

Model	JT7202	JT7201
Screen	7 inch	4.3 inch
Dimension	330mm*230mm*47mm	366mm*140mm*41mm
Material	Aluminium alloy	
Camera Sensor	1.0MP	
View Angle	90°	
LEDs For Night Vision	IR LEDs(120°)	
Connection	CAT5 network cable	
Power Consumption	200mA Max.	
Accessory	Embedded box	
Operating Temp	-40°C~50°C	
Waterproof Rate	Ip53	
Installation	Flush mount	



JT7201

Indoor Monitor

Digital SIP Apartment video intercom system



JT7709T-D

Features

- Support IOS & Android smart phone remote control
- Device to device in TCP/IP protocol, device to smart phone in SIP protocol
- Digital system, CAT5 network cable connection
- Duplex communication, support intercom between monitors
- The call will transfer to smart phone if no one answer from monitor within 30/60/90s optional
- Max. support 32G SD card, and leave message max. 45s
- Ringtone user-defined imported by SD card, support Mp3 format
- 8 security zones alarm(support connecting smoke detector...etc)

Indoor Monitor

Digital SIP Apartment video intercom system



JT7704T-D



JT7703T-D



JT7718T-D



JT7714T-D

Specifications

Model	JT7709T-D/JT7704T-D/JT7718T-D/JT7703T-D/JT7714T-D
Monitor	7" TFT touch screen
Resolution	800(H)x3(RGB)x480(V)
Connect Mode	CAT5 network cable
Intercom Mode	Duplex communication
Leave Message Time	30/60/90s optional
Ringtone	Definition
Conversation Duration	Max.180s
Power Consumption	400mA Max.
Power Supply	External power DC12V
Operation Temp	-40°C~50°C
Installation	Surface mount

Digital SIP Villa video intercom system



■ ■ JT7214-2~4

Features

- 1.0MP camera, 110° angle view
- CAT5 network cable connection, easy to install
- Blue light background button
- Ip65 waterproof level
- IR LED light for better night vision
- Surface mount / Flush mount

Specifications

Model	JT7203	JT7214
Dimension	132mm*44mm*41mm	210mm*116mm*33mm
Material	Acrylic panel + metal main part	Aluminium alloy
Camera Sensor	1.0MP	
View Angle	110°	
LEDs For Night Vision	IR LEDs(120°)	
Connection	CAT5 network cable	
Power Consumption	200mA Max.	
Accessory	Rain cover + angle bracket	Embedded box
Operating Temp	-40°C~50°C	
Leave Message Time	30/60/90s optional	
Ringtone	Definition	
Waterproof Rate	Ip65	
Conversation Duration	120s	
Installation	Flush mount	Surface mount



JT7203

Indoor Monitor

Digital SIP Villa video intercom system




JT7709T

Features

- Support IOS & Android smart phone remote control
- Device to device in TCP/IP protocol, device to smart phone in SIP protocol
- Digital system, CAT5 network cable connection
- Duplex communication, support intercom between monitors
- The call will transfer to smart phone if no one answer from monitor within 30/60/90s optional
- Max. support 32G SD card and leave message max. 45s
- Ringtone user-defined imported by SD card, support Mp3 format

Indoor Monitor

Digital SIP Villa video intercom system

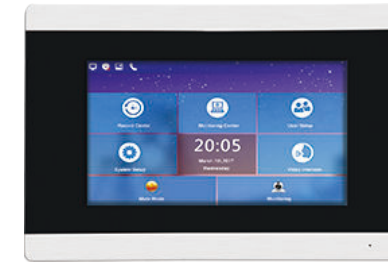


JT7704T



JT7703T



JT7718T

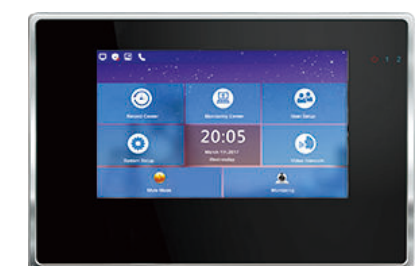

JT7714T

Specifications

Model	JT7709T/JT7704T/JT7718T/JT7703T/JT7714T
Monitor	7" TFT touch screen
Resolution	800(H)x3(RGB)x480(V)
Connect Mode	CAT5 network cable
Intercom Mode	Duplex communication
Leave Message Time	30/60/90s optional
Ringtone	Definition
Conversation Duration	Max.180s
Power Consumption	400mA Max.
Power Supply	External power DC12V
Operation Temp	-40°C~50°C
Installation	Surface mount

System Diagram

Digital SIP Villa/Apartment video intercom system

